

COMPONENT PART NOTICE

THIS PAPER IS A COMPONENT PART OF THE FOLLOWING COMPILATION REPORT:

(TITLE): Proceedings of the International Conference on the Performance of
Off-Road Vehicles and Machines (8th) Volume 2 Held at Cambridge,
England on August 5-11, 1984

(SOURCE): International Society for Terrain-Vehicle Systems

DTIC

ELECTE

DEC 27 1984

TO ORDER THE COMPLETE COMPILATION REPORT USE AD-A148 635.

A

THE COMPONENT PART IS PROVIDED HERE TO ALLOW USERS ACCESS TO INDIVIDUALLY AUTHORED SECTIONS OF PROCEEDINGS, ANNALS, SYMPOSIA, ETC. HOWEVER, THE COMPONENT SHOULD BE CONSIDERED WITHIN THE CONTEXT OF THE OVERALL COMPILATION REPORT AND NOT AS A STAND-ALONE TECHNICAL REPORT.

THE FOLLOWING COMPONENT PART NUMBERS COMPRISE THE COMPILATION REPORT:

ADW:	TITLE:
POOL4 283	The reasearch of the driving wheel with movable lugs of the paddy field floating tractor
POOL4 284	An investigation of the driving wheel thrust of paddy field tractors
POOL4 285	Mobility of the small combine (track type) on soft ground - Relationship between the position of the center of gravity and the mobility
POOL4 286	The stress-strain-time graph of rheological soils and its application
POOL5 287	Behaviour of soil under a lugged wheel
POOL4 288	Prediction accuracy of the torques for rotary tillage by an analog tool
POOL4 289	The analysis on the dynamic performance of a single lug
POOL4 290	Study of the motion of agricultural vehicles on steep grass-covered slopes
Pool4 291	Some stability and control problems with trailed farm tankers on slopes
POOL4 292	Control of tractors on sloping ground
POOL4 293	Stability indicators for front end loaders
POOL4 294	Pressure tests in soil below tires of agricultural vehicles
POOL4 295	Quality control in soil compaction by behaviour of exciter
POOL4 296	Smoother terrain machine
POOL4 297	Compaction of sand using ordinary off-road vehicles
POOL4 298	A simple perdition model for soil compaction under various wheel loads and geometries as an aid to vehicle design
POOL4 299	Flotation tires and subsurface compaction
POOL4 300	Tractor power selection with compaction constraints
POOL4 301	The guidelines to design the lever turning gears in asticulated vehicles
POOL4 302	Study on controllability and stability of high speed tracked vehicles
POOL4 303	Forces on undriven, angled wheels
POOL4 304	Turning behaviour of articulated frame steering tractor

COMPONENT PART NOTICE (CON'T)

ADW:	TITLE:
POOL 305	A tracked vehicle test plant for the simulation of dynamic operation
POOL 306	Proffleinfluss auf Widerstands-und lenkkraft frei rollender reifen (The influence of the tyre tread on the rolling resistance and steering forces on undriven wheels) (including English translation)
POOL 307	Basic study on the turning resistance of track
POOL 308	Study on steerability of articulated tracked vehicles

This document has been approved for public release and sale; its distribution is unlimited.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

✓
COMPACTION OF SAND USING ORDINARY OFF-ROAD VEHICLES

S. SHAABAN

MILITARY TECHNICAL COLLEGE, KOBRY EL KOBBA, CAIRO, EGYPT

AD-P004 297

Summary-This paper examines the possibility of compacting a sandy soil using ordinary off-road vehicles instead of compactors. Laboratory tests showed that a considerable compaction of sand can be achieved if alternative cyclic stresses are applied. Such stresses can be generated if a train of two vehicles is employed for compaction: one vehicle with all wheels driven towed another vehicle having all wheels towed. Compaction was made by making consecutive passages of the train of two vehicles. Procedure of compaction is described and test results are presented. Compacting sand by this method has increased the density up to 92% the value of optimum density obtained by modified compaction test. A considerable amelioration of soil trafficability has also been achieved, this is proved by the experimental drawbar pull-slip relationships measured before and after compaction. ✕

INTRODUCTION

The amelioration of vehicles mobility can be achieved by improving vehicles design and / or by increasing soil trafficability by compaction. Compaction is usually achieved by using compactors which need to be transported to the work sites.

If compaction can be done by ordinary offroad vehicles, this would reduce costs and provide an alternative solution to the problem.

Results of triaxial experiments on sand made by FRANCO [1] showed that one can create considerable volumetric deformations in the soil by applying cycles of alternative stresses.

The intensity of these stresses should be limited so that the induced soil deformation will not be so large, otherwise soil dilatation occurs. In his study, he showed a case where soil dilatation was obtained (volume increased) when sample axial strain was large ($\pm 5\%$). He also showed another case where soil was compacted (volume decreased) when axial strain was limited to a small value ($\pm 0,75\%$).

In practice, alternative stresses are applied to the soil if a vehicle with all wheels driven towed another vehicle having all wheels towed, this is shown in Fig. 1.

Soil deformation is strongly related to wheels slip, therefore wheels slip should be kept small during compaction. Generally, slip should be lower than $30\%[2]$. This slip value corresponds in most cases to the maximum drawbar pull developed by the vehicle. Our traction tests carried out before compacting the experimental soil showed that the maximum drawbar pull is delivered at 10% slip. Thus, we tried to keep wheels slip during compaction below this value.

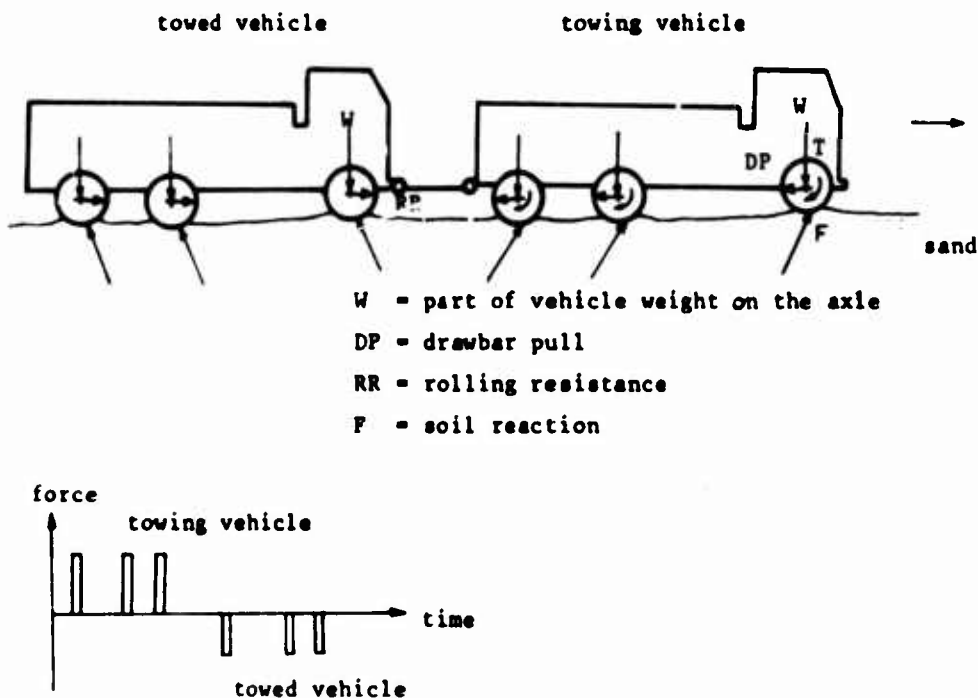


Fig. 1 Forces acting on the soil during compaction.

EXPERIMENTAL SOIL

An uniformly graded sand having a coefficient of uniformity $\frac{D_{60}}{D_{10}} = 2.1$ and a grain size distribution shown in Fig.2 was the experimental soil. Sand bin has a length of 70 m, a width of 7m and a depth of 0,8 m. Moisture content measured before compaction in the layer from 0 to 45 cm of the sand bin was nearly 4%. Laboratory standard and modified compaction tests were carried out, and the dry density-moisture relationships are shown in Fig.3. Compaction curves show that a moisture content of 3 to 5% is unfavourable for compacting such sand. Unfortunately, the existing natural content of 4% was not possible to change because of climate conditions. Surface of sand in the bin was gently levelled before compaction using a light grader.

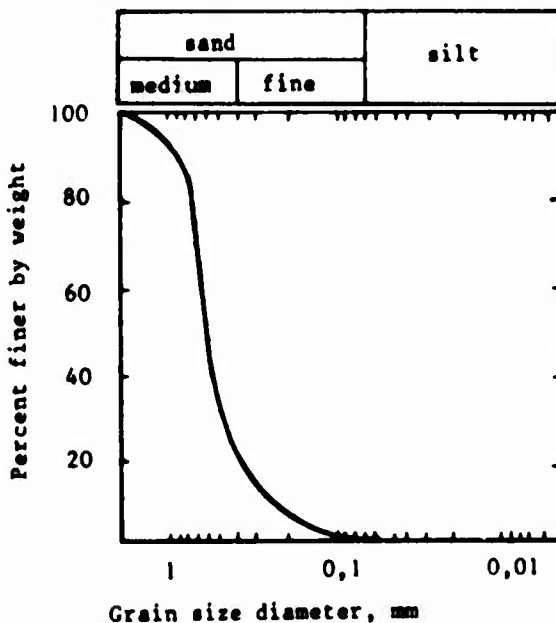


Fig.2 Particle size diameter of experimental soil.

COMPACTION PROCEDURE

Compaction was done by making consecutive passages by the train of two off-road vehicles. The towing vehicle moved with all axles driven and the lowest gear shifted (1st gear in main gear box and low gear in auxiliary gear box). The towed vehicle (connected to the towing vehicle by a steel rope) moved with engine stopped and brakes released.

To increase the resistance on the towing vehicle the top gear in the towed vehicle gear box was shifted and for further increase of resistance a lower gear was engaged.

Increased resistance caused more slip of towing vehicle wheels, thus it was possible to change the degree of slip by shifting different speeds in the towed vehicle gear box. To calculate wheels slip during compaction, the actual distance covered during ten revolutions was measured, and the theoretical distance, which would be covered if wheels purely roll, calculated. Slip value was then determined from the equation:

$$i = \frac{l_{th} - l_a}{l_{th}}$$

where:

i = wheels slip

l_{th} = theoretical distance

l_a = actual distance

First passage was situated 0,5 m from the side wall of soil bin. Followed passages were laterally shifted each by 0,3 to 0,5 m from the former, this is shown in Fig. 4.

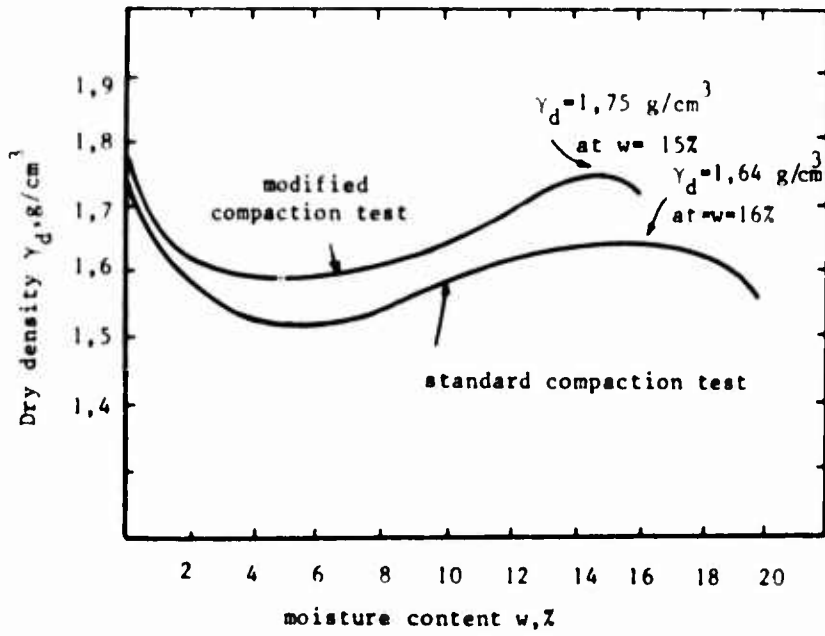


Fig.3 Experimental dry density-moisture relationships.

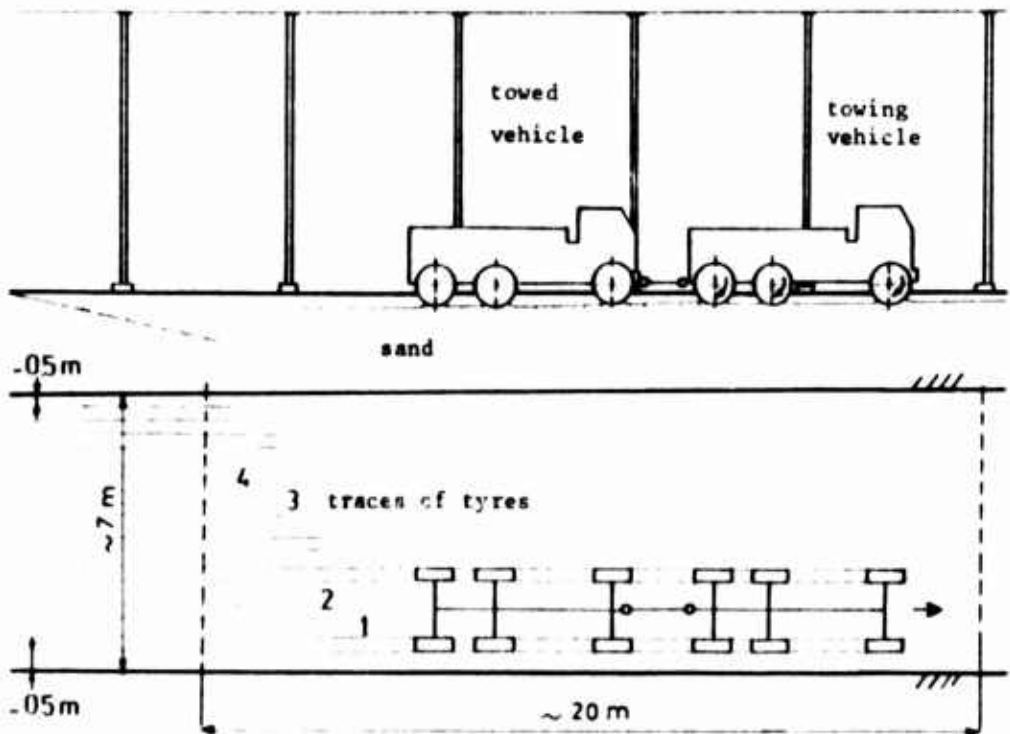


Fig.4 Compaction of the fine sand using the train of two offroad vehicles.

phases	1	2	3	4			
passages	5	4	5	5	3	2	
towing	G	91200					
vehicle	p	1,5	2	2,5	3	F:3,7 R:4,0	F:4,0 R:4,5
	i	2,5	3	3,9	4,5	2,7	-
	Tyres: E 22,5 Pilote x M+S4 Michelin						
towed	G	101200					
vehicle	p	1,3	1,7	2,1	1,8		
	Tyres: 12,00-20 Michelin						

G: vehicle weight, Newtons

p: inflation pressure, bars

i: wheel slip, %

F: front wheels

R: rear wheels.

Table 1. Description of compaction phases.

MEASURED VALUES

Moisture content was measured before each phase of compaction in ten points of soil bin measuring zone. This zone situated in the middle of soil bin had a length of 20 m and width of 5 m. Moisture content samples were taken at depths of 0,15,30 cm. Places of measuring the moisture content are shown in Fig. 5, and average values were as following:

before compaction	w= 4%
before 2 nd compaction phase	= 2,5 %
before 3 rd compaction phase	= 2,5 %
before 4 th compaction phase	= 3,2 %

The in situ density was measured after finishing 2nd, 3rd and 4th compaction phases using γ rays density meter in same points as for moisture content. Before measuring the density, the surface of soil bin was gently levelled. The density meter enabled to have readings of moisture content, bulk and dry densities at depths of 0 to 30 cm. For greater depth (40, 50 cm) the soil surface layers of 10, 20cm thickness were taken off (see Fig.8).

The average of density values in the ten points of same layer was considered as the sand density at that depth.

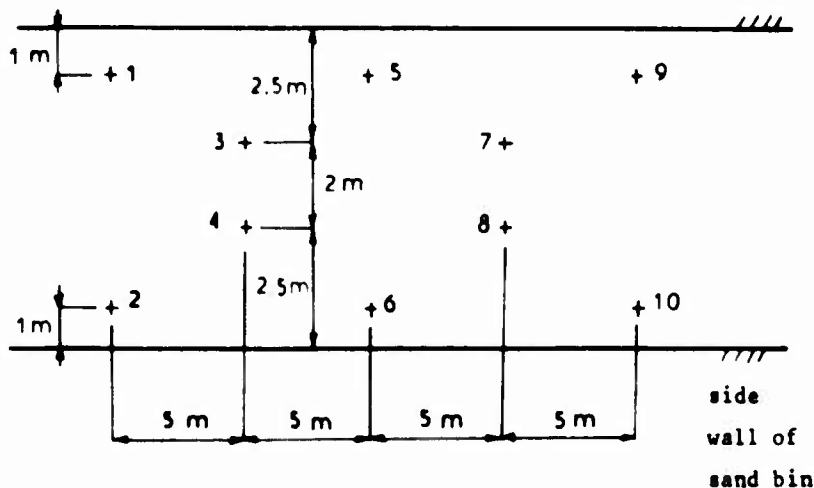


Fig.5 Points of measuring the moisture content and density.

Traction tests were carried out before and after compaction. In these tests the towing vehicle moving in the sand bin pulled a braking vehicle of adjustable braking effort. The pulling force was measured by a force dynamometer, and the speed of travel by a fifth wheel fixed to the towed vehicle. Theoretical speed of vehicle motion was measured by a pulse generator fixed to one of the towing vehicle rear wheels (Fig.9). Instantaneous values of pulling force (drawbar pull), travel and theoretical speeds were continuously recorded on a multichannel recorder, and the drawbar pull-slip relationships were traced.

RESULTS

The in situ dry density-depth relationships (Figs 6,7) are considered as a measure of degree of compaction. Fig.6 shows that after the third compaction phase the sand dry density at a depth of 20 cm increased to 93% of the optimum dry density determined by modified compaction test, at a depth of 30 cm it increased to 95% of the optimum dry density. Fig.7 shows that after the fourth compaction phase the sand dry density at a depth of 30 cm slightly decreased to 92% of the optimum value. But at 50 cm depth, it attained a high value (97% of the optimum).

The drawbar pull-slip relationships (Fig.8) measured before and after compaction are considered for evaluating the amelioration of soil trafficability by compaction. Referring to Fig.8, it is seen that the maximum drawbarpull (at 10% slip) increased by 30%, and for lower slip values it increased up to 60 %. Average values of drawbar pull and the corresponding slip are given in table 2.

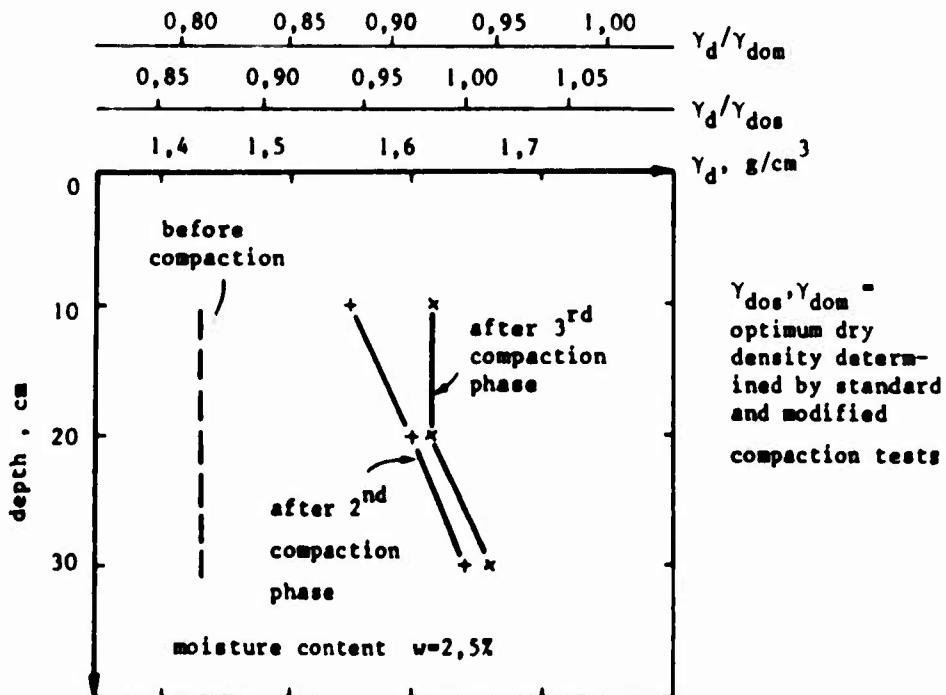


Fig.6 Dry density γ_d vs depth after 2nd and 3rd compaction phases.

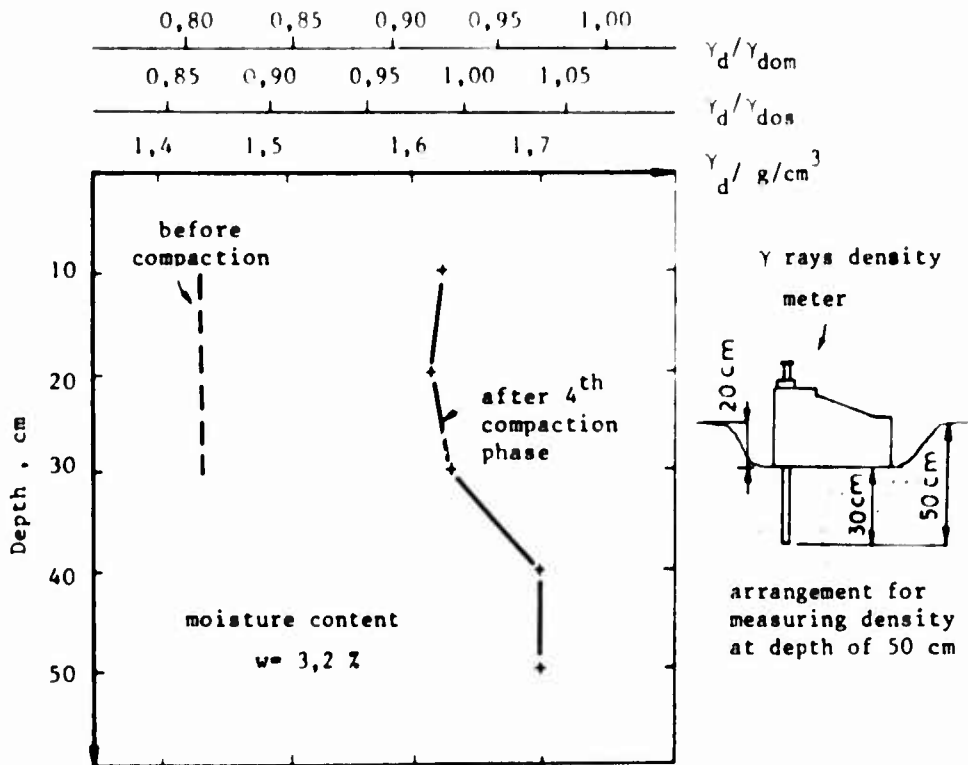


Fig.7 Dry density (γ_d) vs depth after 4th compaction phase

wheel slip%	DP before compaction	DP after compaction	% of increase
3	1360	2185	60,66
5	1625	2235	37,54
7	1785	2300	28,85
10	1830	2385	30,33
15	1825	2300	26,03
20	1690	2155	27,51
30	1560	1835	17,63
40	1410	1700	20,06
60	1136	1370	20,07
80	975	1235	26,67
100	1300	2200	69,23

Table 2 Drawbar pull values before and after compaction.

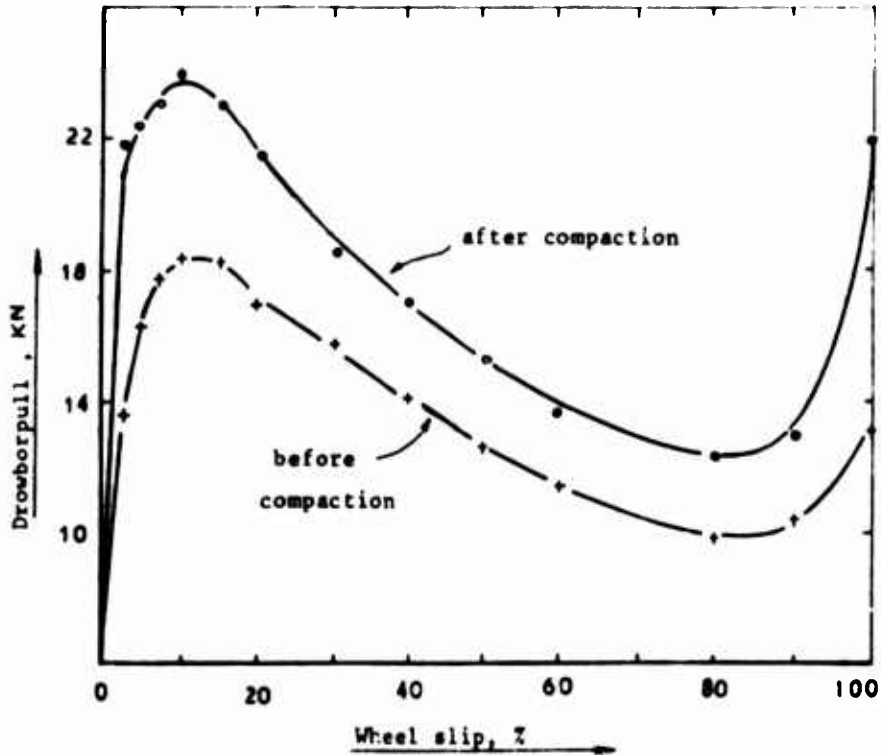


Fig.8 Drawbar pull-slip experimental curves before and after compaction.

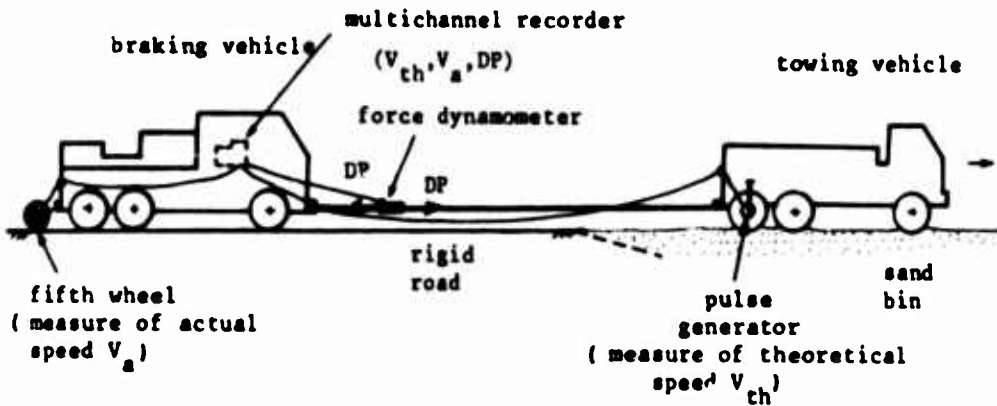


Fig.9 Traction test.

CONCLUSIONS

1. The proposed method for sand compaction in which alternative stresses are applied to the soil using a train of two off-road vehicles proved to be efficient, sand density at a depth of 30 cm increased to 92% of the optimum dry density determined by modified compaction test, and to 95% at 50 cm depth.
2. During compaction of sand, slip of wheels of compactors should be enough lower than the slip corresponding to the maximum drawbar pull determined by traction test. A slip of 5% can be considered as a limit value beyond which soil decompaction occurs.
3. Inflation pressure of vehicle tyres should be successively increased, and a pressure of 3,5 bars can be considered as a limit value. Greater inflation pressure increases the wheels slip and sinkage and leads to soil decompaction
4. A considerable degree of compaction was achieved although the sand was relatively uniform and the moisture content of 3% was unfavourable.

Acknowledgement: The author acknowledges the co-operation and assistance of the ETAS (Etablissement Technique d'Angers) in France in whose soil bin the experiments were carried out. He also wishes to express his appreciation to Professor J.Biares, Dr Christian Grosjean, and Mr. Constantin for their support and assistance.

REFERENCES

- 1 T.Franco-Vellela, "Mesures des propriétés rhéologiques du sol en régime non permanent ou cyclique", Thesis of Dr Ing, "Ecole Centrale des Arts et Manufactures" PARIS, 1979.
 - 2 G.S.V Raghavan, E. Mekkayes, Statistical models for predicting compaction generated by off-road vehicular traffic in different soil types, Journal of Terramechanics, vol 3, No.1, 1978.
 - 3 J.Jacques Fry, "Contribution à l'étude et à la pratique du compactage", Thesis of Dr Ing, "Ecole Centrale des Arts et Manufactures, Paris, 1977.
- 